

HG60S ECONOMIC GLOSS METER



- 3.5 inch large screen with high resolution full-view display
- Display 3 sets of measurement data ,better for comparison
- Super configuration of hardware,integrated multiple innovative technologies
- Stable performance ,easy to read measure data
- Automatic calibration ,convenient and quick



HG series economic gloss meter is independently developed by 3nh ,with independent intellectual property ,manufactured according to ISO2813 and GB/T 9754. HG series with characteristic of larger display screen ,supply with high-end QC software ,stable performance ,high accuracy and easy to use .

HG60S ECONOMIC GLOSS METER

Gloss measurement so easy
with one-touch to complete!

PRODUCT FEATURES

- 1.60° angle for semi gloss
2. Concise appearance, feel good
3. Display 5 sets of measurement data, good for comparison
4. Built-in lithium ion rechargeable battery
5. Basic model measurement can meet basic glossiness testing requirements
6. One button for all angles measurement at the same location
7. Comply with international standards
8. Stable performance, easy to read data.
9. Optional accessories: Micro printer, easy to carry, without computer can continuously print out the measurement of various parameters, easy to save.



APPLICABLE INDUSTRIES



Automobile

Stonematerial

Plastic

Metal

Paints

Printing

Others

SPECIFICATION FEATURES

Measuring Angle:60°

Comply with standard: ISO 2813, GB/T 9754, ASTM D 523, ASTM D 2457

Measuring Area (mm):9x15

Measuring Range:0~200GU

Division Value:1GU

Reproducibility: ±1GU

Repeatability: ±1GU

Measurement Standard:Conform with JJG696 secondary class glossmeter working requirement

Chromaticity Corresponding:Corresponding with CIE 1931(2°) under CIE C light source **Errors:**±1.5 , ± 1.5%

Measuring Time:0.5s

Dimension:L*W*H : 160mm*75mm*90mm

Weight:350g

Language:Chinese/English

Battery:3200mAh Li-ion Battery, >10000 times(within 8 hours)

Display:TFT 3.5 inch

Interface: Power-only USB

Operation Temperature:0~40°C(32~104°F)


Storage Temperature:-20~50°C(-4~122°F)

Humidity:<85% relative humidity, no condensation

Standard Accessories:Power Adapter, USB cable, User Manual, Calibration Plate

Optional Accessories:Miniature Printer

GUANGDONG THREENH TECHNOLOGY CO., LTD.

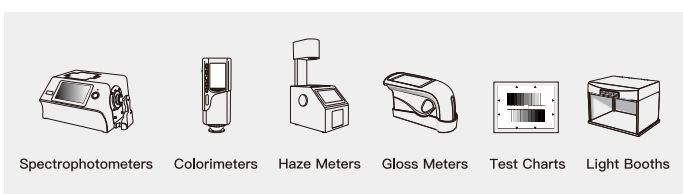

Spectrophotometers

Colorimeters

Haze Meters

Gloss Meters

Test Charts

Light Booths

★ CONTACT US

web:www.3nh.com

Email:3nh@3nh.com

Tel:0086-020-82880288

Add: 6-8th floors, Building B33, Low Carbon Headquarters Park, Xincheng Road No.400, Zengcheng District, Guangzhou, Guangdong Province, China